

## KOLIKA SERIES GEN 2

 DIRECT

L1KOU

SUSPENDED

L2KOU

SURFACE

L3KOU

RECESSED



### FEATURES

- Slim linear extruded aluminum body with aluminum die cast end caps
- Opal acrylic frosted lens diffuses light evenly
- Lumens: 375 lm/ft to 1000 lm/ft
- Efficacy: 103.43 lm/ft to 114.3 lm/ft
- Voltage: 120V, 120-277V, 347V, 0-10V dimming is standard
- Long-life LEDs that provide 80+ CRI or 90+ CRI

### TM21 TABLE

Time (t) at which to estimate lumen maintenance (hours)	50,000
Lumen maintenance at time (t) (%)	88.47%
Calculated L70 (hours)	150,000
Reported L70 (hours)	>90,000

Note: Lumens are based on 30K colour temperature.

### FIXTURE COLOUR


- Silver
- White
- Black
- On Demand

### INDIVIDUAL

### CONTINUOUS



### AVAILABLE COLOUR TEMPERATURES

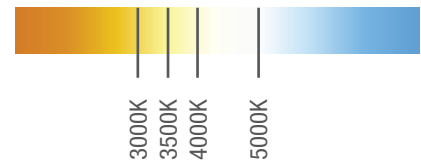

**5**  
yr  
warranty

  
canadian  
made

  
LED  
fixture

  
dimmable  
fixture

**6**  
damp  
location

  
ICES  
005

  
C US